

Surface Conditioning Scotch-Brite™ 3M™ SC-BL



Features:

Grain:	Aluminum oxide
Backing:	Non-woven, fabric reinforced
Bonding:	Artificial Resin
Coating:	Open
Grit Range:	A-Coarse, A-Medium, A-Very Fine *
Appearance:	Branded

* ■ = in stock ■ = available within 3-5 weeks

Benefits:


- More stable design with fabric backing
- Extremely low belt stretch
- Especially suitable for heavier applications with low flexibility

Applications:

- Deburring, matting and finishing of stainless steel and steel
- Application of a defined finish even on large areas
- Reduction of surface roughness
- Various applications also possible on wood and plastics

For the right cutting speed for your application, please refer to the cutting speed information sheet.

Application examples:

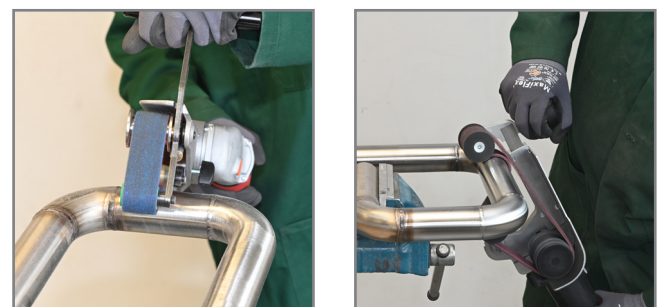

GeBrax GmbH

Obere Hommeswiese 41-45
 57258 Freudenberg
 Germany

Phone: +49 27 34 / 28 474-0
 Fax: +49 27 34 / 28 474-10

E-Mail: info@gebrax.de
www.gebrax-abrasives.com

Further information on request. Subject to technical changes.

Materials:

